


Ball Screw Support Bearings Made of EP-Steel

Meeting the needs of the machine tool industry by offering:

- Super long life with NSK's new high-purity EP-steel
- Extra-high precision and rigidity



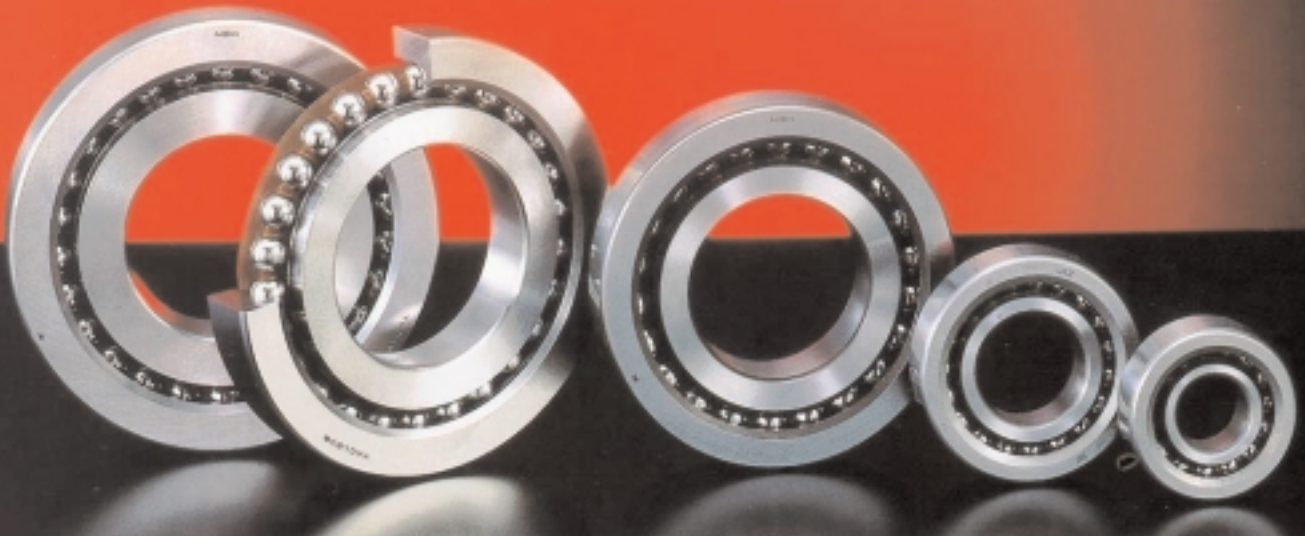

EP-steel angular contact ball screw support bearings provide an excellent standardized solution for machine tool feed applications. Their superiority over conventional bearing arrangements is demonstrated by the following outstanding features:

Super long life

The use of EP-steel provides an operating life three times longer than that of conventional bearing materials.

High rigidity

An increased number of balls and a 60-degree contact angle mean higher rigidity.

Low starting torque

Higher precision rotation is achieved with low driving power because the starting torque is lower than that of tapered or cylindrical roller bearings.

Easy preload adjustment

Bearing preload is adjusted to the optimum value at manufacture. Universal bearings (symbol SU) will give the specified preload in DB or DF mounting and when mounted in tandem will share load equally.

Simple design of surrounding parts

Since NSK ball screw support bearings will support axial and radial loads, the design of the housing and shaft is simpler than that which is necessary for the combined use of thrust and radial bearings.

Easy handling

The bearings are easy to handle owing to the incorporation of non-separable inner/outer rings. Bearings prepacked with standard grease are available.

New polyamide cage

A newly developed polyamide cage is utilized to obtain higher precision rotation.

Ball Screw Support Bearings Made of EP-Steel

TAC B Nominal contact angle: 60°

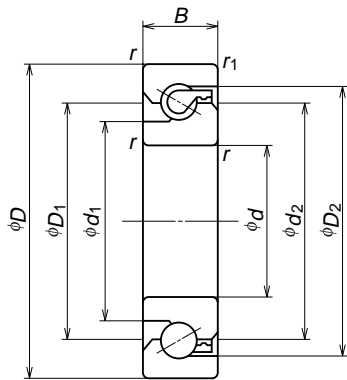


Table 1 Dimensions

Bearing number	Boundary dimensions (mm)					Reference dimensions (mm)			
	<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i>	<i>r</i> ₁	<i>d</i> ₁	<i>d</i> ₂	<i>D</i> ₁	<i>D</i> ₂
17 TAC 47B	17	47	15	1	0.6	27.2	34	34	39.6
20 TAC 47B	20	47	15	1	0.6	27.2	34	34	39.6
25 TAC 62B	25	62	16	1	0.6	37	46	45	50.7
30 TAC 62B	30	62	15	1	0.6	39.5	47	47	53.2
35 TAC 72B	35	72	15	1	0.6	47	55	55	60.7
40 TAC 72B	40	72	15	1	0.6	49	57	57	62.7
40 TAC 90B		90	20	1	0.6	57	68	68	77.2
45 TAC 75B	45	75	15	1	0.6	54	62	62	67.7
45 TAC 100B		100	20	1	0.6	64	75	75	84.2
50 TAC 100B	50	100	20	1	0.6	67.5	79	79	87.7
55 TAC 100B	55	100	20	1	0.6	67.5	79	79	87.7
55 TAC 120B		120	20	1	0.6	82	93	93	102.2
60 TAC 120B	60	120	20	1	0.6	82	93	93	102.2

Table 2 Preload, spring constant and starting torque (preload symbol: C10)


Bearing number	Duplex combinations (DF)			Triplex combinations (DFD)			Quadruplex combinations (DFF)		
	Preload <i>N</i>	Axial spring constant <i>N/μm</i>	Starting torque ⁽¹⁾ <i>N · m</i>	Preload <i>N</i>	Axial spring constant <i>N/μm</i>	Starting torque ⁽¹⁾ <i>N · m</i>	Preload <i>N</i>	Axial spring constant <i>N/μm</i>	Starting torque ⁽¹⁾ <i>N · m</i>
17 TAC 47B	2 150	750	0.14	2 950	1 080	0.20	4 300	1 470	0.29
20 TAC 47B	2 150	750	0.14	2 950	1 080	0.20	4 300	1 470	0.29
25 TAC 62B	3 150	1 000	0.23	4 300	1 470	0.31	6 250	1 960	0.46
30 TAC 62B	3 350	1 030	0.24	4 500	1 520	0.33	6 650	2 010	0.49
35 TAC 72B	3 800	1 180	0.28	5 200	1 710	0.37	7 650	2 350	0.55
40 TAC 72B	3 900	1 230	0.28	5 300	1 810	0.38	7 850	2 400	0.57
40 TAC 90B	5 000	1 320	0.48	6 750	1 960	0.65	10 300	2 650	0.96
45 TAC 75B	4 100	1 270	0.29	5 600	1 910	0.40	8 250	2 550	0.59
45 TAC 100B	5 900	1 520	0.58	8 050	2 210	0.78	11 800	3 000	1.16
50 TAC 100B	6 100	1 570	0.60	8 250	2 300	0.80	12 300	3 100	1.18
55 TAC 100B	6 100	1 570	0.60	8 250	2 300	0.80	12 300	3 100	1.18
55 TAC 120B	6 650	1 760	0.64	9 100	2 650	0.86	13 200	3 550	1.27
60 TAC 120B	6 650	1 760	0.64	9 100	2 650	0.86	13 200	3 550	1.27

Note (1): The starting torque figures given are for grease lubrication. If oil is used, increase these figures by 40 percent.
Please consult with NSK for combinations other than the ones shown here.

Purity of EP-Steel

NSK is at the forefront of bearing steel development and has newly developed a technique for evaluating nonmetallic inclusions that shorten rolling fatigue life. The high purity of EP-steel is the result of the introduction of this technique into steel manufacturing technology.

EP-steel has fewer large-sized particles than Vacuum Arc Remelted (VAR) or conventionally refined bearing steel (see graphs below).

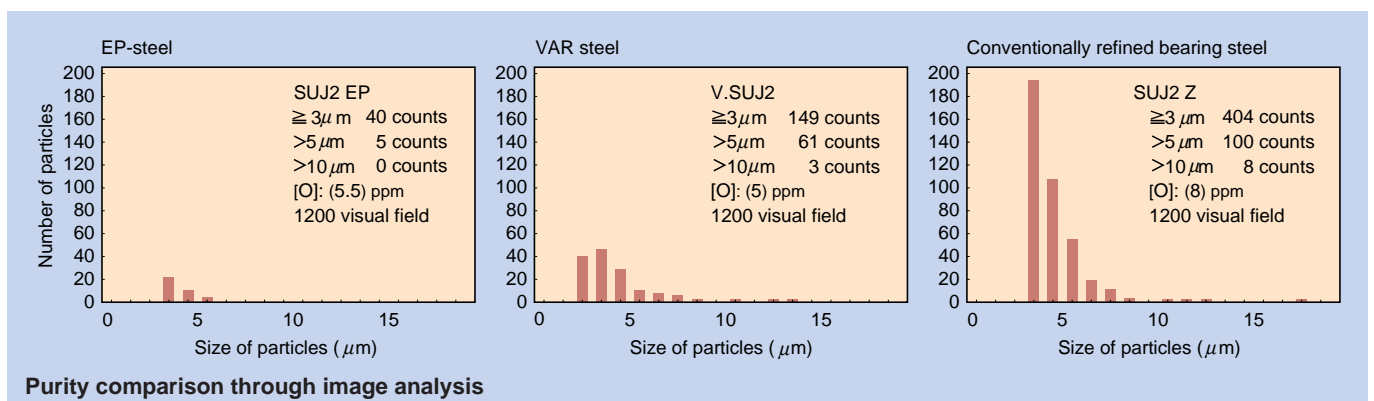



NSK Ltd. has a basic policy not to export any products or technology that has been designated as controlled items by export related laws. When exporting such products that are shown in this pamphlet, the laws of the exporting country must be observed.

For more details, please contact any of the following NSK offices.

World-wide Manufacturing and Marketing Organization

NSK LTD.—Headquarters

Japan: Tokyo
 AMERICAS & EUROPE DEPARTMENT Phone: 03-3779-7120
 ASIA MARKETING & SALES DEPARTMENT Phone: 03-3779-7121
NSK AMERICAS, INC.
[AMERICAN HEADQUARTERS]
 U.S.A.: Ann Arbor Phone: 734-761-9500
NSK CORPORATION
 U.S.A.: Ann Arbor Phone: 734-761-9500
[Precision Product Division]
 U.S.A.: Chicago Phone: 630-924-8000
[TECHNICAL CENTER]
 U.S.A.: Ann Arbor Phone: 734-668-0877
[BRANCHES and DISTRIBUTION CENTERS]
 U.S.A.: Los Angeles Phone: 562-926-2975
NASTECH
 U.S.A.: Vermont Phone: 802-442-5448
NSK SAFETY TECHNOLOGY, INC.
 U.S.A.: Detroit Phone: 248-338-4959
NSK-RHP AMERICAN DISTRIBUTION CENTER, INC.
 U.S.A.: Miami Phone: (305) 261-7824
NSK-RHP CANADA INC.
 Canada: Toronto Phone: 905-890-0740
NSK RODAMIENTOS MEXICANA, S.A. DE C.V.
 Mexico: Mexico City Phone: 5-301-2741
NSK DO BRASIL INDUSTRIA E COMERCIO DE ROLAMENTOS LTDA.
 Brazil: São Paulo Phone: 011-269-4700
NSK-RHP EUROPE LTD. [European Headquarters]
 England: Ruddington Phone: 0115-936-6464
NSK-RHP EUROPE LTD. WARSAW LIAISON OFFICE
 Poland: Warsaw Phone: 022-645-1525, 1526

NSK BEARINGS EUROPE LTD.

England: Peterlee Phone: 0191-586-6111
NSK-RHP EUROPEAN TECHNOLOGY CO., LTD.
 England: Ruddington Phone: 0115-940-5409
NSK-RHP UK LTD.
 England: Ruddington Phone: 0115-936-6600
NSK-RHP DEUTSCHLAND GMBH.
 Germany: Düsseldorf Phone: 02102-481-0
NSK-RHP FRANCE S.A.
 France: Paris Phone: 01 30 57 39 39
NSK-RHP NEDERLAND B.V.
 Netherlands: Amsterdam Phone: 020-6470711
NSK-RHP EUROPEAN DISTRIBUTION CENTRE B.V.
 Netherlands: Amsterdam Phone: 020-6470711
NSK-RHP ITALIA S.P.A.
 Italy: Milano Phone: 02-995191
NSK-RHP IBERICA, S.A.
 Spain: Barcelona Phone: 93-575-1662
FLT ISKRA S.A.
 Poland: Kielce Phone: 041-366-61-11
NSK-RHP BEARINGS MIDDLE EAST TRADING CO., LTD.
 Turkey: Istanbul Phone: 216-463-6150
NSK-RHP SOUTH AFRICA (PTY) LTD.
 South Africa: Johannesburg Phone: 011 (458) 3600
NASTECH EUROPE LTD.
 England: Coventry Phone: 01203-674241
NSK INTERNATIONAL (SINGAPORE) PTE LTD.
 Singapore: Singapore Phone: 2730357
NSK SINGAPORE (PRIVATE) LTD.
 Singapore: Singapore Phone: 2781711
NSK-RHP AUSTRALIA PTY. LTD.
 Australia: Melbourne Phone: 03-9764-8302

NSK-RHP BEARINGS NEW ZEALAND LTD.

New Zealand: Auckland Phone: 09-276-4992
NSK BEARINGS (THAILAND) CO., LTD.
 Thailand: Bangkok Phone: 2-6412150-58
SIAM NASTECH CO., LTD.
 Thailand: Chachoengsao Phone: 038-522-343-52
PT. NSK BEARINGS MANUFACTURING INDONESIA
 Indonesia: Jakarta Phone: 021-898-0155
NSK BEARINGS (MALAYSIA) SDN. BHD.
 Malaysia: Kuala Lumpur Phone: 03-758-4396
NSK MICRO PRECISION (M) SDN. BHD.
 Malaysia: Kuala Lumpur Phone: 03-961-6288
RANE NASTECH LTD.
 India: Madras Phone: 4114-66001, 66002
NSK KOREA CO., LTD.
 Korea: Seoul Phone: 02-3287-0300
NSK-RHP HONG KONG LTD.
 China: Hong Kong Phone: 2739-9933
KUNSHAN NSK HS CO., LTD.
 China: Kunshan Phone: 0520-7305654
GUIZHOU HS NSK BEARINGS CO., LTD.
 China: Anshun Phone: 0853-3521505
TAIWAN NSK PRECISION CO., LTD.
 Taiwan: Taipei Phone: 02-2591-0656
NSK REPRESENTATIVE OFFICES
 India: Chennai Phone: 044-4334732
 China: Beijing Phone: 010-6590-8161-3
RHP BEARINGS LIMITED
 England: Newark Phone: 01636-605123

Specifications are subject to change without notice and without any obligation on the part of the manufacturer. Every care has been taken to ensure accuracy of the data contained in this catalog, but no liability can be accepted for any loss or damage suffered through errors or omission. We will gratefully acknowledge any additions or corrections.