


### foot mounted hoist M, 2 rope falls (reeving 2/1)

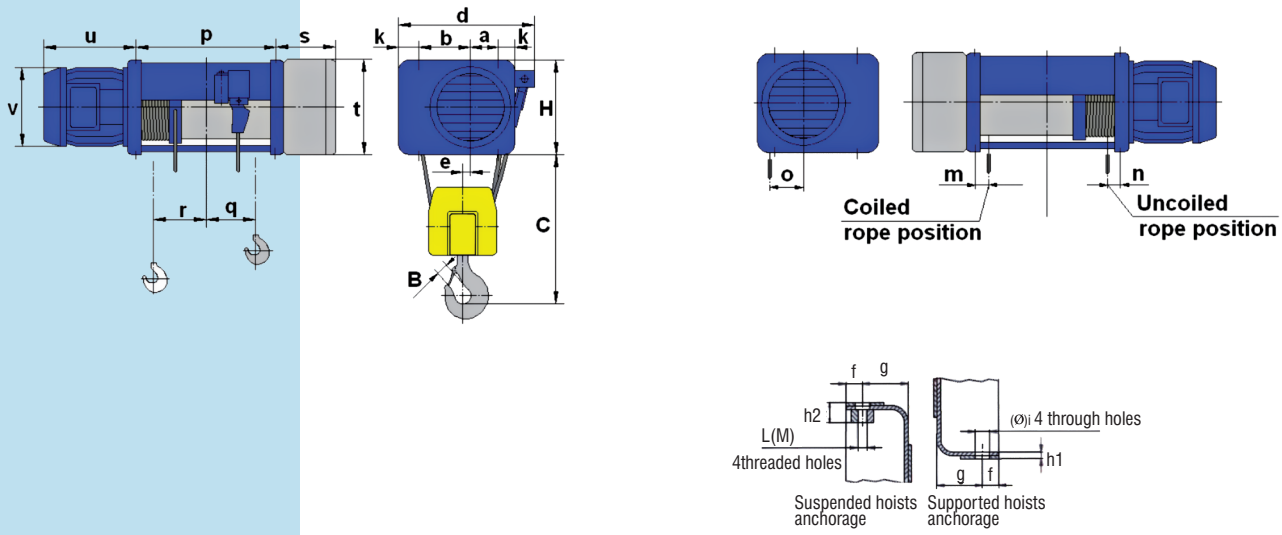


Hoist type	Capacity, kg	Rope, mm	Fixed dimensions, mm																
			B	C	H	a	b	k	d	e	f	g	h1	h2	i	L	m	n	o
M740	8000	Ø15	56	850	530	167,5	307,5	80,5	470	64	23,5	44,5	12	47	25	27	50	75	178
M950	10000	Ø20	71	1030	624	200	340	92	515	66,5	28,5	59,5	24	66	37	36	55	90	210
M1125	25000	Ø30	90	1325	804	232,5	452,5	137,5	705	89	40	80	19	58	37	30	75	120	276,5

Hoist type	Hook travel, m	Variable dimensions, mm									
		p	q	r	s	t	Motors				
							NA		VA		
		3	4	5	6	7	8	9	10	11	
M740	14	553	148	78							
	19	713	178	128	299	400	502	440	508	440	
	26	928	285	128							
M950	20	840	228	118							
	32	1255	435	118	314	400	513	440	519	440	
M1125	20	977	305	105							
	24	1162	400	100	415	400	579	440	587	440	
	30	1402	520	100							

Hoist capacity, kg	Weight, kg		
	Hook travel, m		
	14	19	26
8000	600	654	713
	-	20	32
10000	-	1140	1280
	20	24	30
25000	2350	2430	2690

Hoist type	Capacity, kg	Hook travel, m	Hook position	Reactions, kg			
				R1	R2	R3	R4
				5	6	7	8
M740	8000	14	uep	2993	3148	906	953
			dep	1400	1472	2499	2629
		19	uep	2923	3074	976	1027
			dep	1250	1314	2649	2787
		26	uep	3147	3310	752	791
			dep	1412	1485	2487	2616
M950	10000	20	uep	3807	3907	1128	1158
			dep	1774	1821	3161	3244
		32	uep	4178	4288	757	777
			dep	2004	2056	2931	3009
		20	uep	9530	10775	2204	2491
			dep	4606	5207	7128	8059
M1125	25000	24	uep	9906	11200	1828	2066
			dep	4857	5492	6876	7775
		30	uep	10219	11553	1515	1713
			dep	5030	5687	6704	7579



uep – upper end position of the hook; dep – down end position. of the hook