


normal headroom hoist M, 2 rope falls (reeving 2/1)

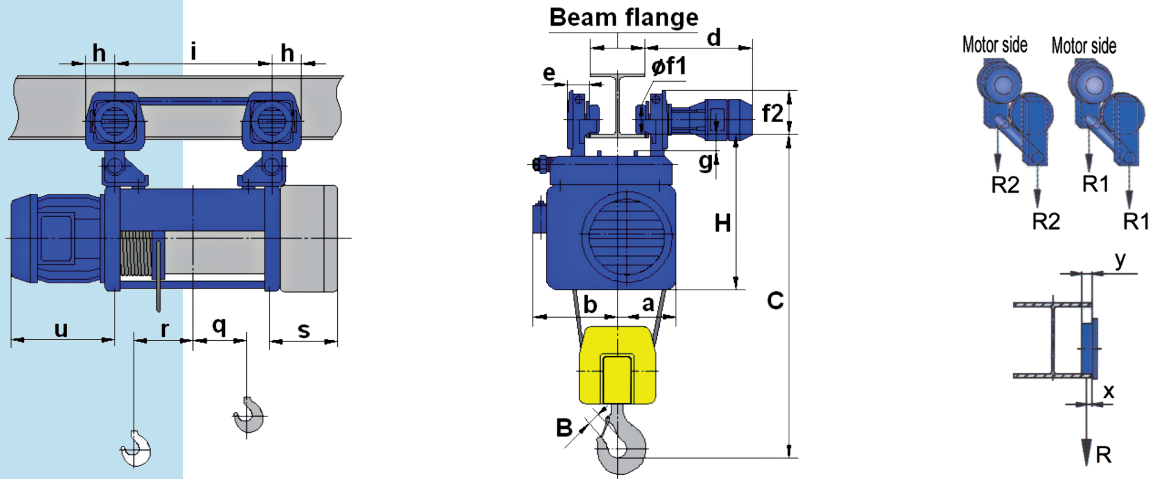

Hoist type	Capacity, kg	Rope, mm	Fixed dimensions, mm											Max beam flange width	Min beam flange width
			B	C	H	a	b	d	e	f1	f2	g	h		
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
M740	8000	Ø15	56	1635	745	308	410	515	100	200	225	46	135	300	150

Hoist type	Hook travel, m	Variable dimensions, mm					
		i	q	r	s	Motors	
						NA	VA
1	2	3	4	5	6	7	8
M740	14	553	148	78	299	502	508
	19	713	178	128			
	26	928	285	128			

Wheel diameter, mm	x	y
200	22	45

Hoist type	Capacity, kg	Hook travel, m	Hook position	Reactions, kg	
				R1	R2
1	2	3	4	5	6
M740	8000	14	uep	930	3070
			dep	2564	1436
		19	uep	1002	2998
			dep	2718	1282
		26	uep	772	3228
			dep	2551	1449

Hoist capacity, kg	Weight, kg		
	Hook travel, m		
8000	14	19	26
	975	1143	1193

uep – upper end position of the hook; dep – down end position of the hook.